

PRODUCT DESCRIPTION

Cover dedicated for standard, small KLUS extrusions. Cover with unique properties unparalleled in the market, available only from KLUS Company. It has a very high light transmission rate. We recommend using the HS cover when sealing extrusions. The HS cover in its design is more rigid than the other covers. It is ideally suited to build LED luminaries which are exposed to vibrations. They fit tightly into the extrusion. It should be installed "45 degrees" in relation to the housing. HS covers were tested in extreme climatic conditions. Along with other tests, they were exposed to the sun in Florida and Singapore. HS cover can withstand high temperatures 120C/ 248F.

- Double-sided UV protection (very good resistance to weathering)
- Very good mechanical resistance
- Good class of refractory-resistance


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Material	PC
Available length	39.4", 78.75", 118.11"
UV resistance	yes


TECHNICAL DRAWING







RELATED EXTRUSIONS

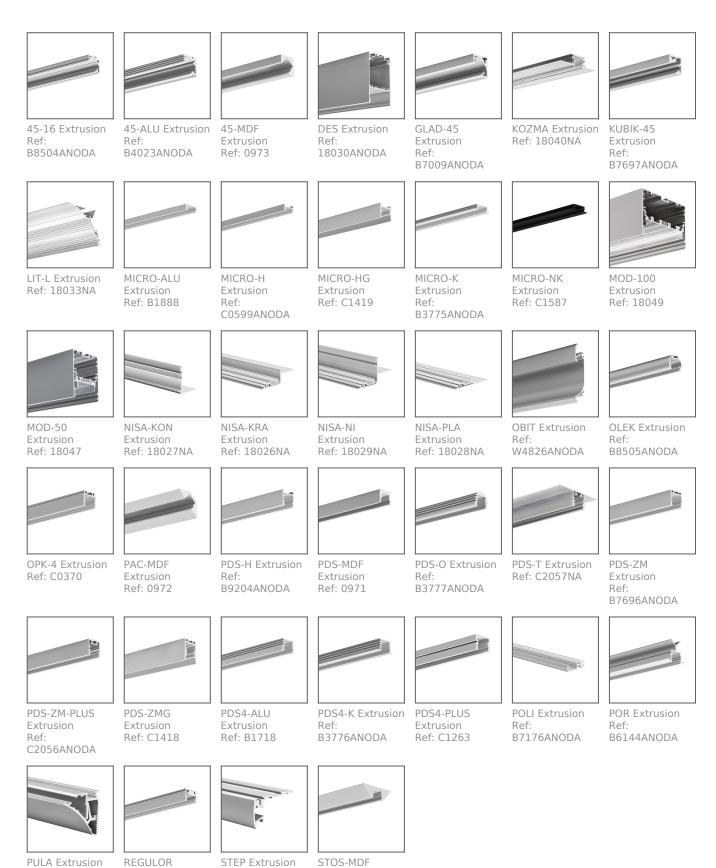

STOS-MDF

Extrusion

Ref: 0974

PULA Extrusion Ref: 18035ANODA

REGULOR

Extrusion

B468+43ANODA

Ref:

Ref:

B4845ANODA



RELATED PRODUCTS