

POST



Mechanical data:


Mounting: on the ground / foundation required
Casing: aluminium
Power supply: inside

Optical data:

Light distribution: symmetrical, street or park
Lighting: direct

Other data:

Contains light source: yes
Type of source: LED
Application: parks, estates, surroundings of office buildings, private properties
On request: fuse connector, , DALI, A 1-10V

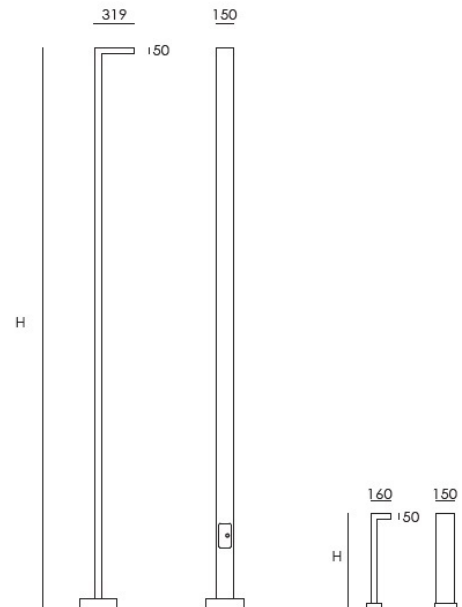


POST is an outdoor luminaire with a simple timeless design. It can illuminate not only pavements and alleys, but also the surrounding of residential and public buildings. Available in variety of heights.

Gallery



Osiedle Słoneczne Bielany, Elbląg

C - color



L - lenses

- 02 - asymmetric floodlighting distribution
- 03 - street lighting distribution
- 04 - park lighting distribution

* for power supply cable from 4mm² to 25mm² (for power supply cable up to 4mm² fuse connector included)

Catalogue code	Light source	Light flux	Power	Color temperature	CRI/RA	Weight	Dimensions
5463.403.LC	LED	4000lm	30W	3000K	≥80	27,00kg	L=319, W=150, H=3000mm

Accessories

foot cover catalogue code 90.13C
