


PRODUCT DESCRIPTION

- Designed to reach an IP65 waterproof rating
- Line of light
- Concealed aluminum elements
- The profile does not interfere with a structure made of 16mm thick drywall

FINISH :

Non anodized (raw) 

*Custom colors available upon request

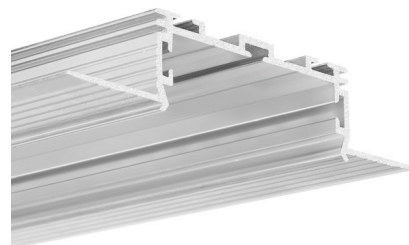

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date

TECHNICAL SPECIFICATION

Application

- to create a line of light flush with the surface of walls and ceilings

Mounting


- fixed in the groove with mounting adhesive
- profile fastening wings covered with gypsum plaster
- the **protective insert TECH-50** ensures that the profile slot remains wide enough for the snap-in cover (its use is necessary during mounting and finishing works)

Additional information

- possibility of making a linear fixture with IP65 protection, which means the fixture is dustproof and waterproof in contact with water jets
- designed for up to four 10 mm wide LED strips
- line of light obtainable with the LIGER-50 cover and LED strips with a minimum of 120 LED /m
- the cover is evenly illuminated with four LED strips, with fewer strips shadows appear on the cover
- the KOZUS-50 profile is equipped with ZM sockets (ZM Connectors are used to connect profiles lengthwise, they are easily accessible even after mounting the profile in the ceiling)
- the groove cut out in the drywall to accommodate the profile should be 51 mm - 56 mm wide

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C0958NA_1	Non anodized (raw)	1000 mm
C0958NA_2	Non anodized (raw)	2000 mm
C0958NA_3	Non anodized (raw)	3000 mm

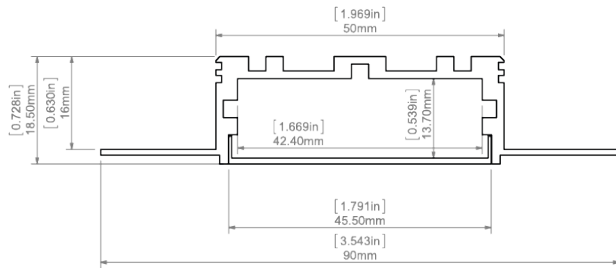TECHNICAL DRAWING


RELATED PRODUCTS

COVERS

FROSTED COVERS




LIGER-50 frosted
Cover
Ref: 17086



END CAPS


REGULAR END CAPS




KOZUS-50 grey
End cap
Ref: 24282

ACCESSORIES


COMPONENTS FOR CONNECTING PROFILES




ZM-NA-90
Connector
Ref: 42723



ZM-NA-120
Connector
Ref: 42729



ZM-NA-135
Connector
Ref: 42725




ZM-NA-180
Connector
Ref: 42724




ZM-NA-PION-135
Connector
Ref: 42727



ZM-NA-PION-90
Connector
Ref: 42726



ZM-NA-45
Connector
Ref: 42339



ZM-NA-PION-120
Connector
Ref: 42321



ZM-NA-PION-60
Connector
Ref: 42317




ZM-NA-PION-45
Connector
Ref: 42315

SEALING COMPONENTS



6.4 x 3.0 Gland
Ref: 42264

ADDITIONAL ITEMS



TECH-50
protective insert
Ref: 17125

MARKETING MATERIALS



Foam 70265
Ref: 70265



Display
P230-90155M
Ref: 90155M